


Figure 1

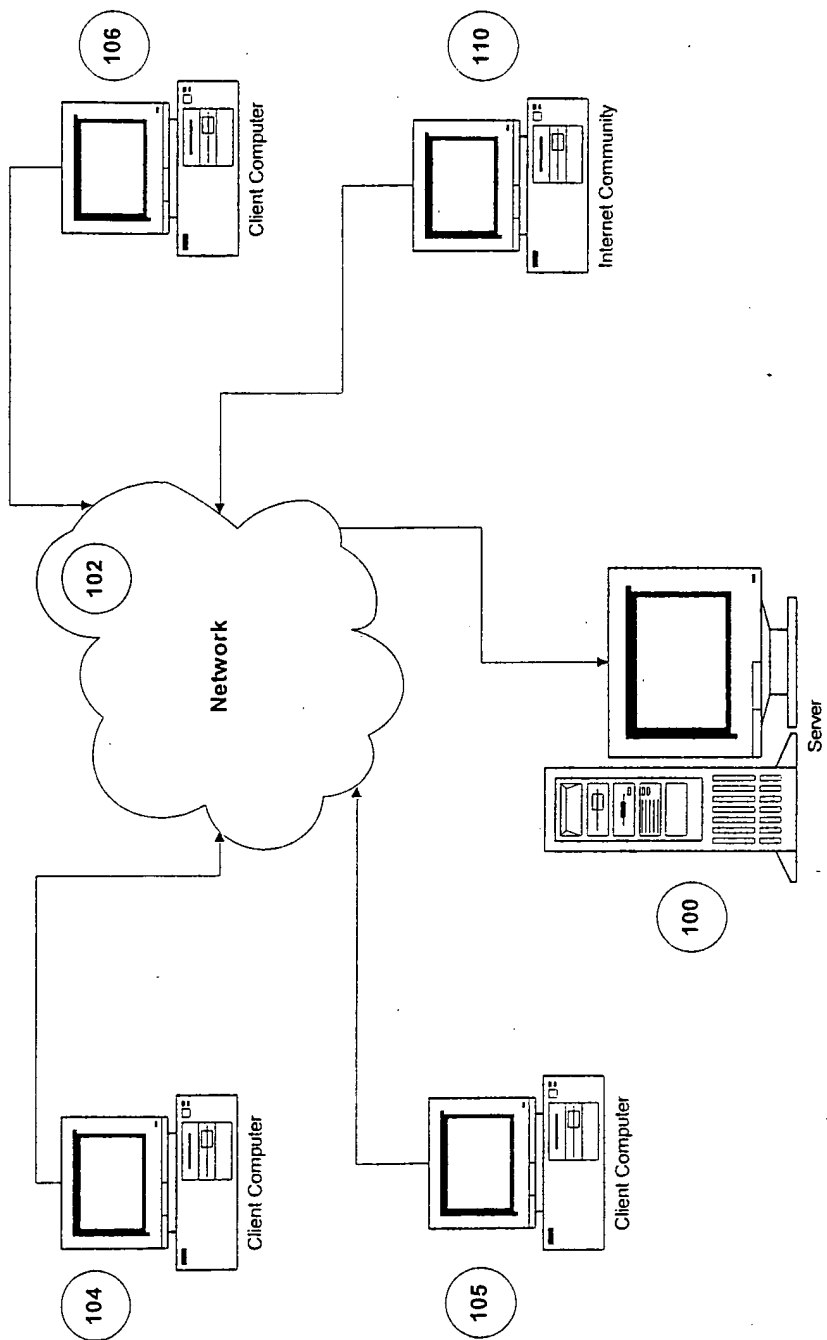

09314250-070301

# Lab Information Management System

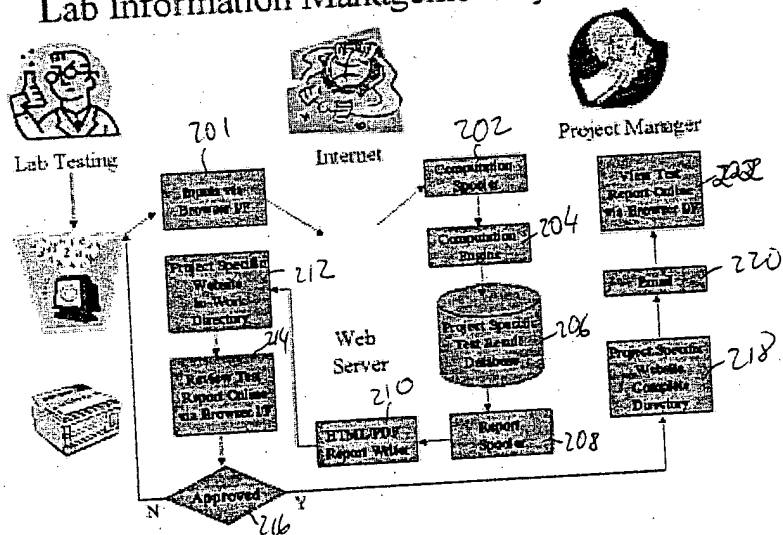


FIG. 2

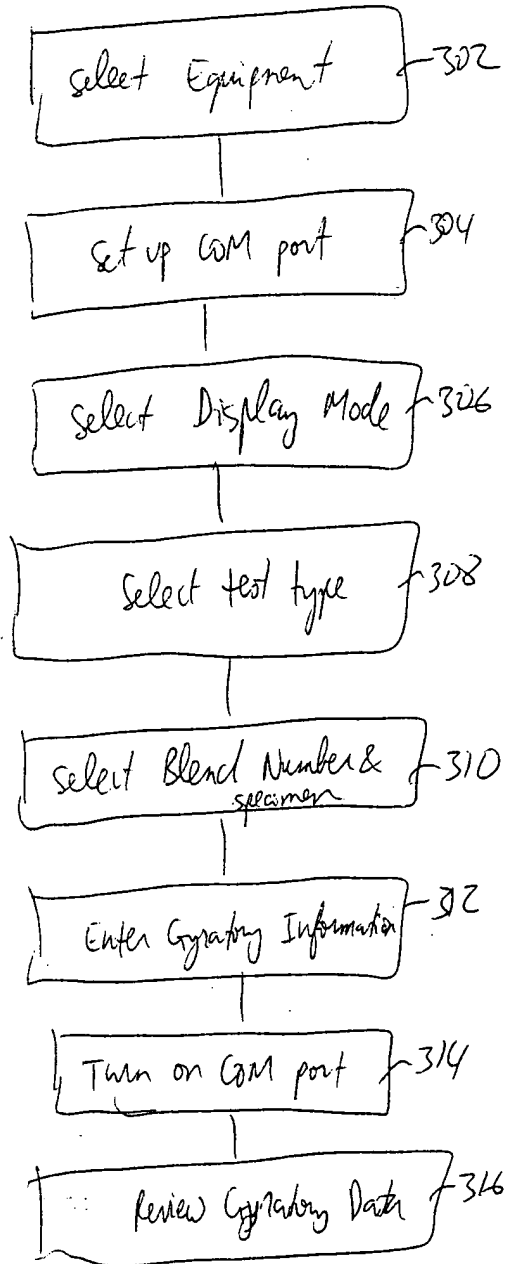
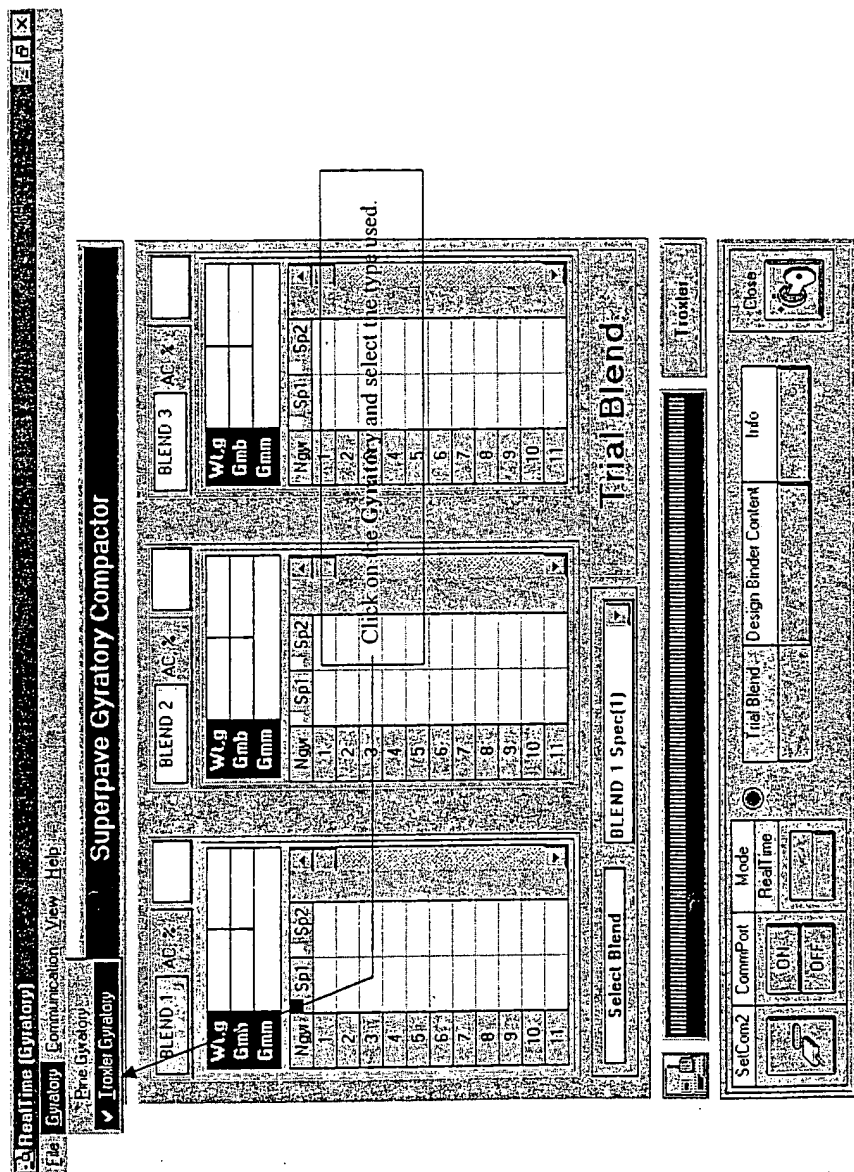


FIG. 3A



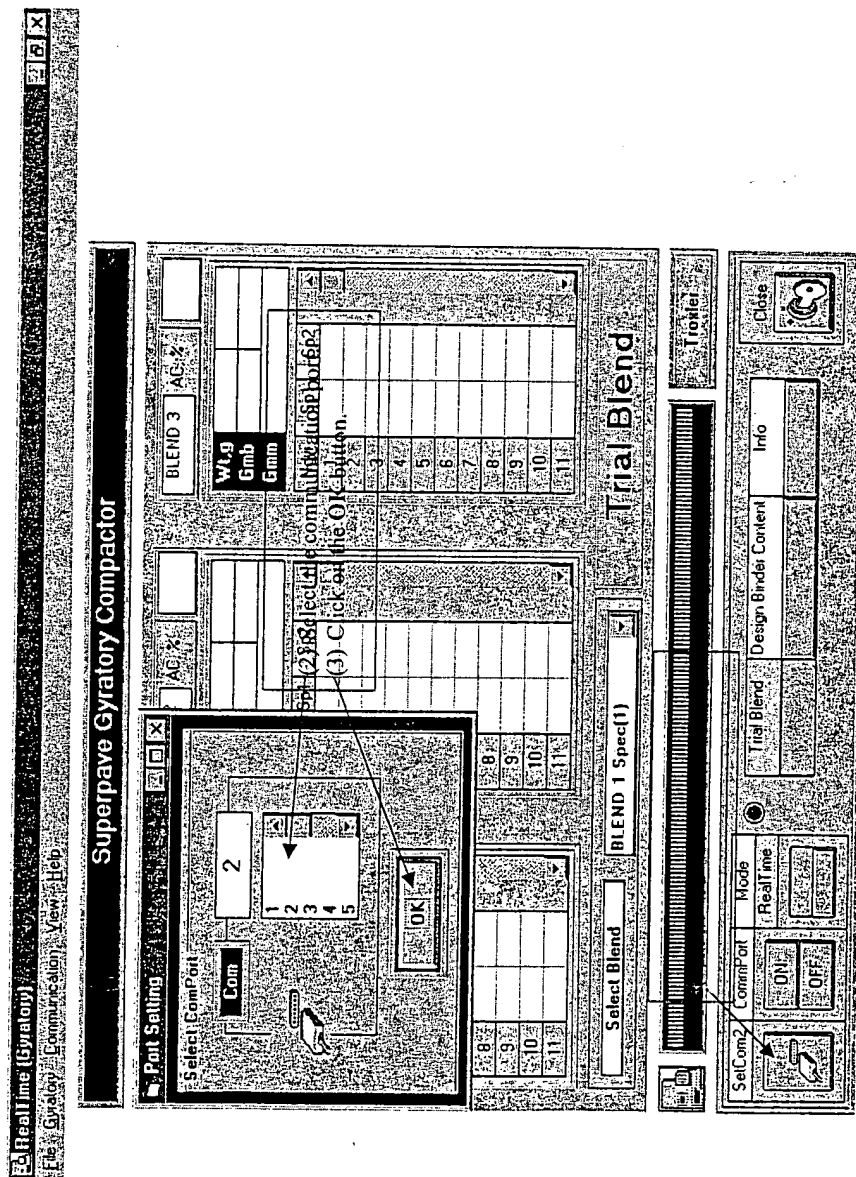


FIG. 3C

RealTime (Gyratony)

FIG. 3D

**REALTIME (Gyraloy) (F:\SHARED\ATSER\GYR\TEST5.PIN)**  
 File Gyraloy Communication View Help

**Superpave Gyraloy Compactor**

BLEND 1 AC 2 4.5

Wt. g	4800	4860
Gmb	2.315	2.325
Gmm	2.561	

Ngr	Sp1	Sp2
1	137.7	
2	135.7	
3	134	
4	132.5	
5	131.2	
6	130.1	
7	129.1	
8	127.4	
9	127.4	
10	126.7	
11	126.1	

BLEND 2 AC 2

Wt. g		
Gmb		
Gmm		

Ngr	Sp1	Sp2
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		

BLEND 3 AC 2

Wt. g		
Gmb		
Gmm		

Ngr	Sp1	Sp2
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		

Select Blend BLEND 1 Spec(1)

**Trial Blend**

When it is ready to run a test:

- (1) Click on the Info button to enter the information: (or after a test)
- (2) Click on the CommPort switch: ON to turn it on.
- (3) Review and check data.

SetCom2 CommPort Mode Real Time

ON OFF

Trial Blend Design Binder Content Info

Close

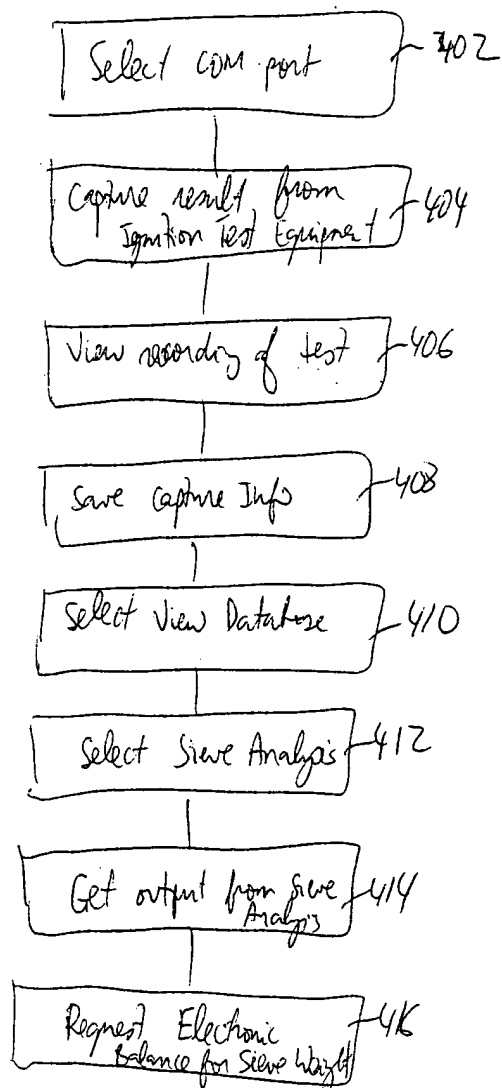


FIG. 4A



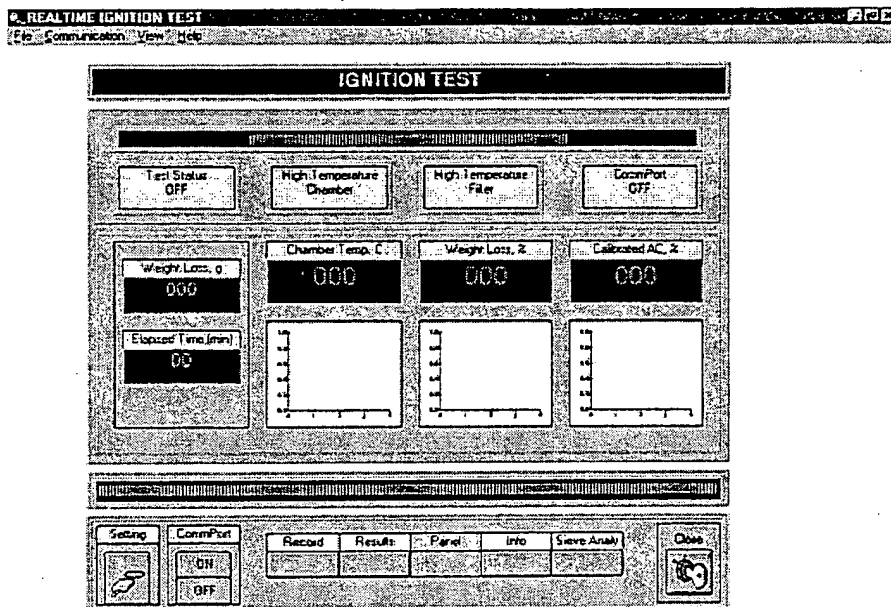


FIG. 4B

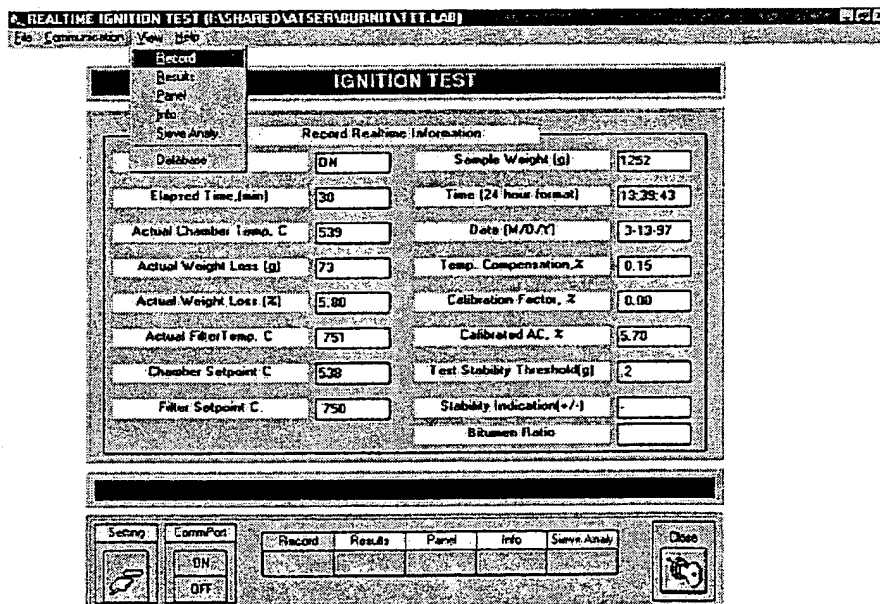


FIG. 4C

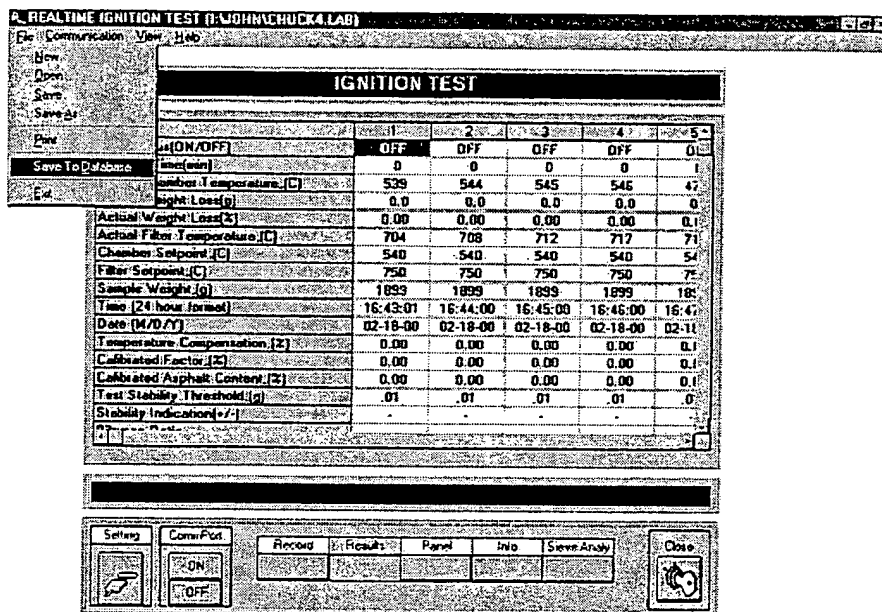


FIG. 4D

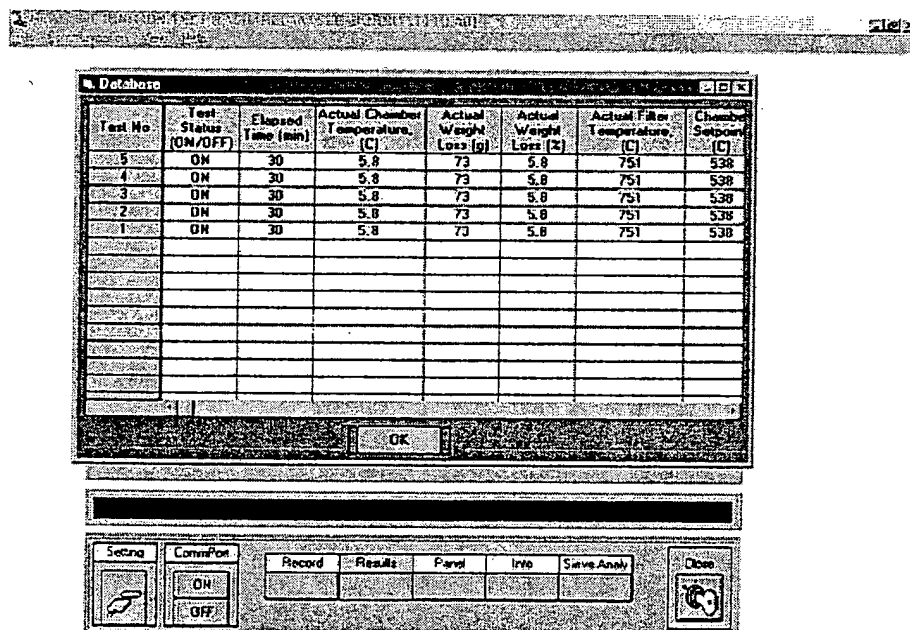


FIG. 4E

[illegible]

FIG. 4F